

-30/+12°C

LABORATORY REFRIGERATORS
AND FREEZERS

PHARMACEUTICAL REFRIGERATORS
AND FREEZERS

-23/+10°C

LR/LF/LRM 430/630

- Steel interior/Alu
- White or Steel exterior (LRM models only available with steel exterior)
- Right hand hinged reversible door
- Fan for air circulation
- Light
- Castors
- Door lock
- Airforced cooling
- Automatic door closing
- Adjustable shelves

CONTROLLER


- Digital display
- Visual and acoustic alarm
- Adjustable high/low temperature alarm
- Contact for remote alarm
- Door open alarm
- Probe failure alarm

LR/LF 140/170/390/340


- Digital display
- Visual alarm
- White exterior (Steel exterior optional)
- Right hand reversible door
- Lock

2008/01842

ДЕЛ № 13016

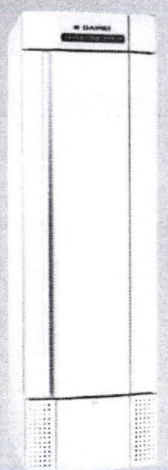


LR/LF 430

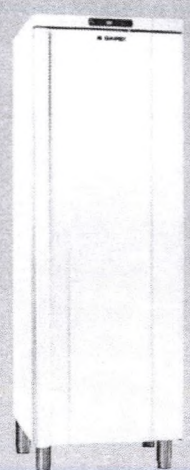


LR 390/LF 340

Optional Spark free interior

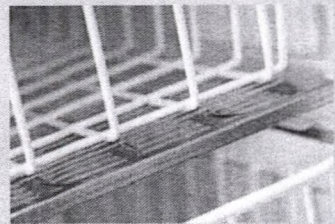

LF 140 comes with direct cooling under each basket.

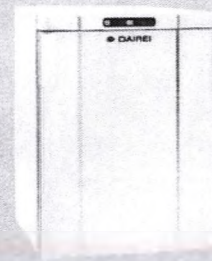

LR 140/LF 140

SPECIFICATIONS

Model	LR 430***	LF 430***	LRM 430***	LR 390***	LF 390***
Item code (DAI no.)	DAI530	DAI525	DAI530	DAI535	DAI540
Dimensions exterior WxDxH (mm)	600x740x2000	600x740x2000	600x740x2000	615x740x2000	615x740x2000
Net capacity (L)	425	425	425	425	425
Temperature range (degrees)	+2/+12	-5/+30	-5/+12	-5/+12	-5/+30
Power supply (V)	230	230	230	230	230
Frequency (Hz)	50	50	60	50	50

Model	LRM 530***	LR 170***	LF 140***	LR 390***	LF 340***
Item code (DAI no.)	DAI545	DAI550	DAI560	DAI555	DAI558
Dimensions exterior WxDxH (mm)	615x740x2000	595x620x1820	595x620x1820	595x620x1780	595x620x1730
Net capacity (L)	625	168	124	387	332
Temperature range (degrees)	-5/+12	+2/+15	-10/-25	+2/+15	-10/-25
Power supply (V)	230	230	230	230	230
Frequency (Hz)	50	50	50	50	50

This unit can optionally be equipped with either 60 Hz compressor (add -60 to the above product name - refrigerant stays the same) or refrigerant R134a in refrigerators (add -R1 to the above product name) or R404a in freezers (add -R2 to the above product name) which then operates 50/60Hz.


** This unit can optionally be equipped with 60 Hz compressor.



PR/PF 1400

PR SERIES

With class leading cooling performance, the pharmaceutical refrigerators and freezers from Dairei gives a good overview with the double pane glass doors. The new Dairei controller ensures reliable temperature and is equipped with many alarm features you receive full security.

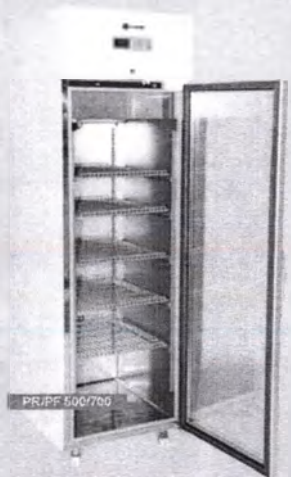

PR/PF 500/700

SPECIFICATIONS

Model	PR 500*	PF 500*	PR 700*	PF 700*	PR 1400*	PF 1400*
Item code (DAI no.)	DAI850/851*	DAI857/856*	DAI860/861*	DAI865/866*	DAI870/871*	DAI875/876*
Dimensions exterior WxDxH (mm)	615x800x2010	615x800x2010	720x850x2020	720x850x2020	1440x860x2020	1440x860x2020
Net capacity (L)	500	500	700	700	1400	1400
Temperature range (degrees)	+1/+10	-10/-23	+1/+10	-10/-23	+1/+10	-10/-23
Power supply (V)	230	230	230	230	230	230
Frequency (Hz)	50	50	50	50	50	50

We reserve the right to change specifications without notice. Subject to confirmation and availability.

* DAI number for unit with stainless steel exterior

** For stainless steel exterior please add -ST to the existing product name.

PR/PF SERIES

- Stainless steel interior
- White exterior
- Automatic door closing
- Airforced cooling
- Adjustable shelves
- Door lock
- Glass door

NEW CONTROLLER

- Micro processor controller with Digital display
- Battery backup - 48 hours
- Visual and acoustic alarm
- Adjustable high/low temperature alarm
- Power failure alarm
- Probe failure alarm
- Instrument failure alarm
- Door open alarm
- Contact for remote alarm
- Prepared for GSM alarm
- Integrated Data Logger (software included)
- RS485 interface
- USB read out

