



Фотографические изображения
медицинского изделия

*Система диагностическая ультразвуковая ClearVue
с принадлежностями*

УТВЕРЖДАЮ

Руководитель Отдела по
управлению качеством

ООО «ФИЛИПС»

О.В.Бахвалова

« 20 » мая 2017 г.










2. Панель управления.

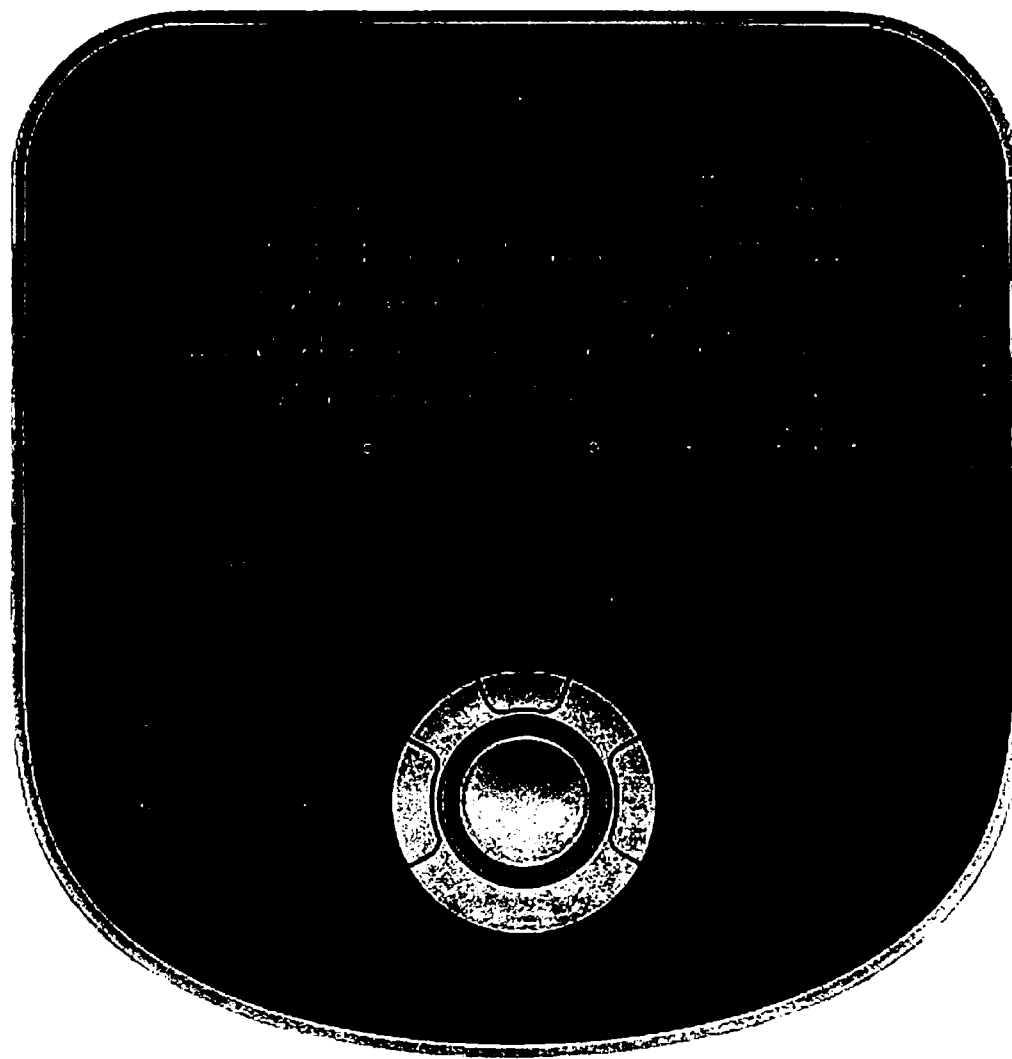

3. Блок базовый.



Принадлежности: 1. Лента бумажная термическая специальная (не более 10 рулонов).

7




2. Ванночки для дезинфекции датчиков (не более 2 шт.).




3. Гель для пациентов (не более 24 флаконов).



4. Датчики ультразвуковые (не более 20 шт.).

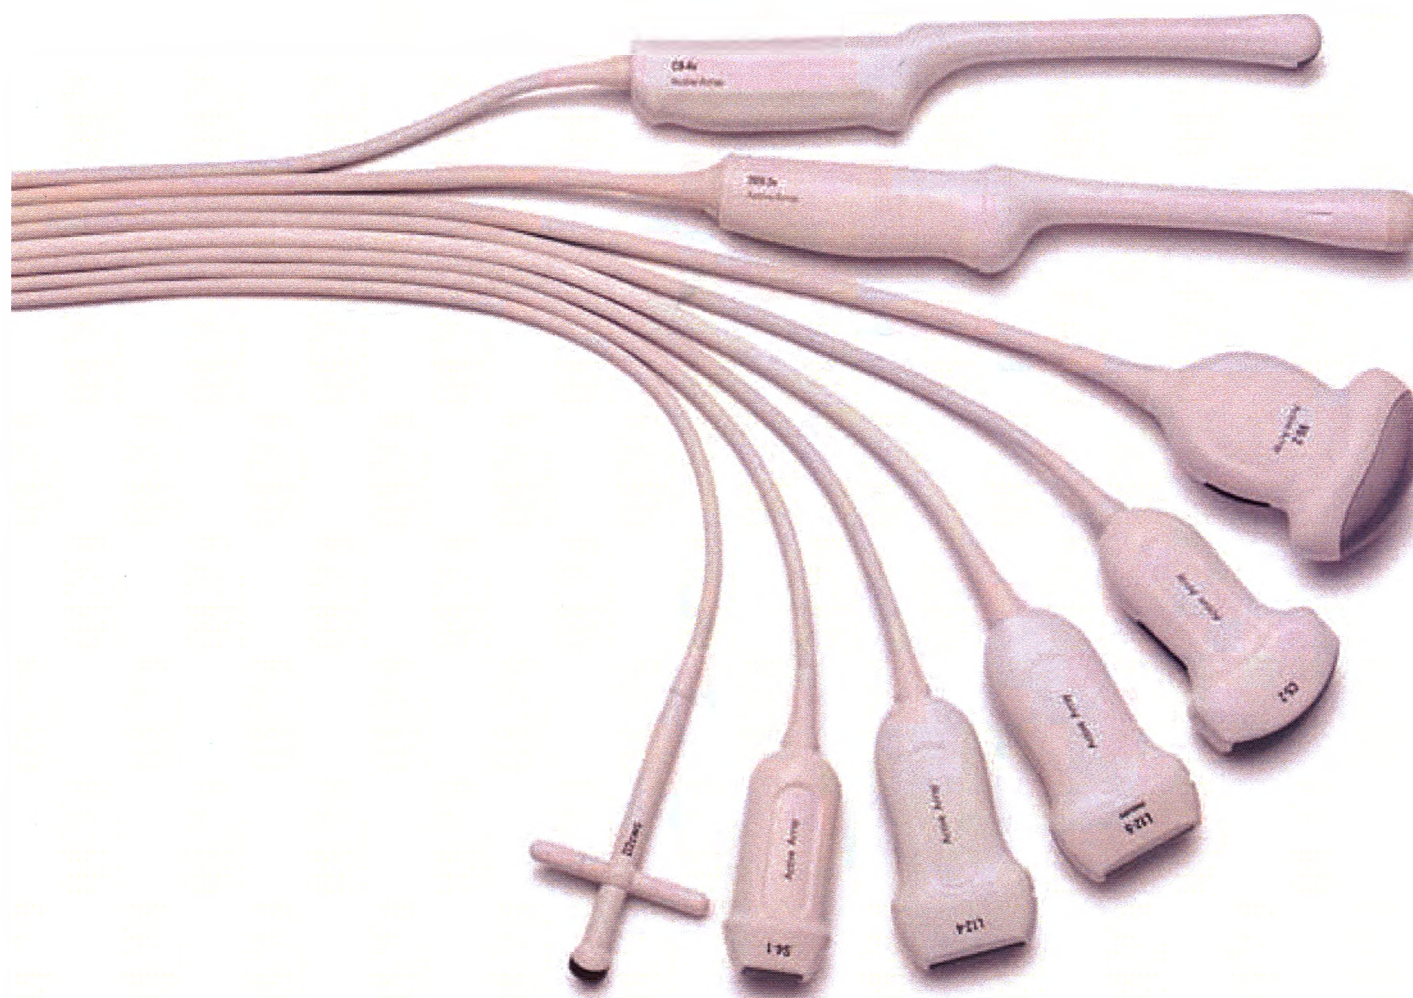

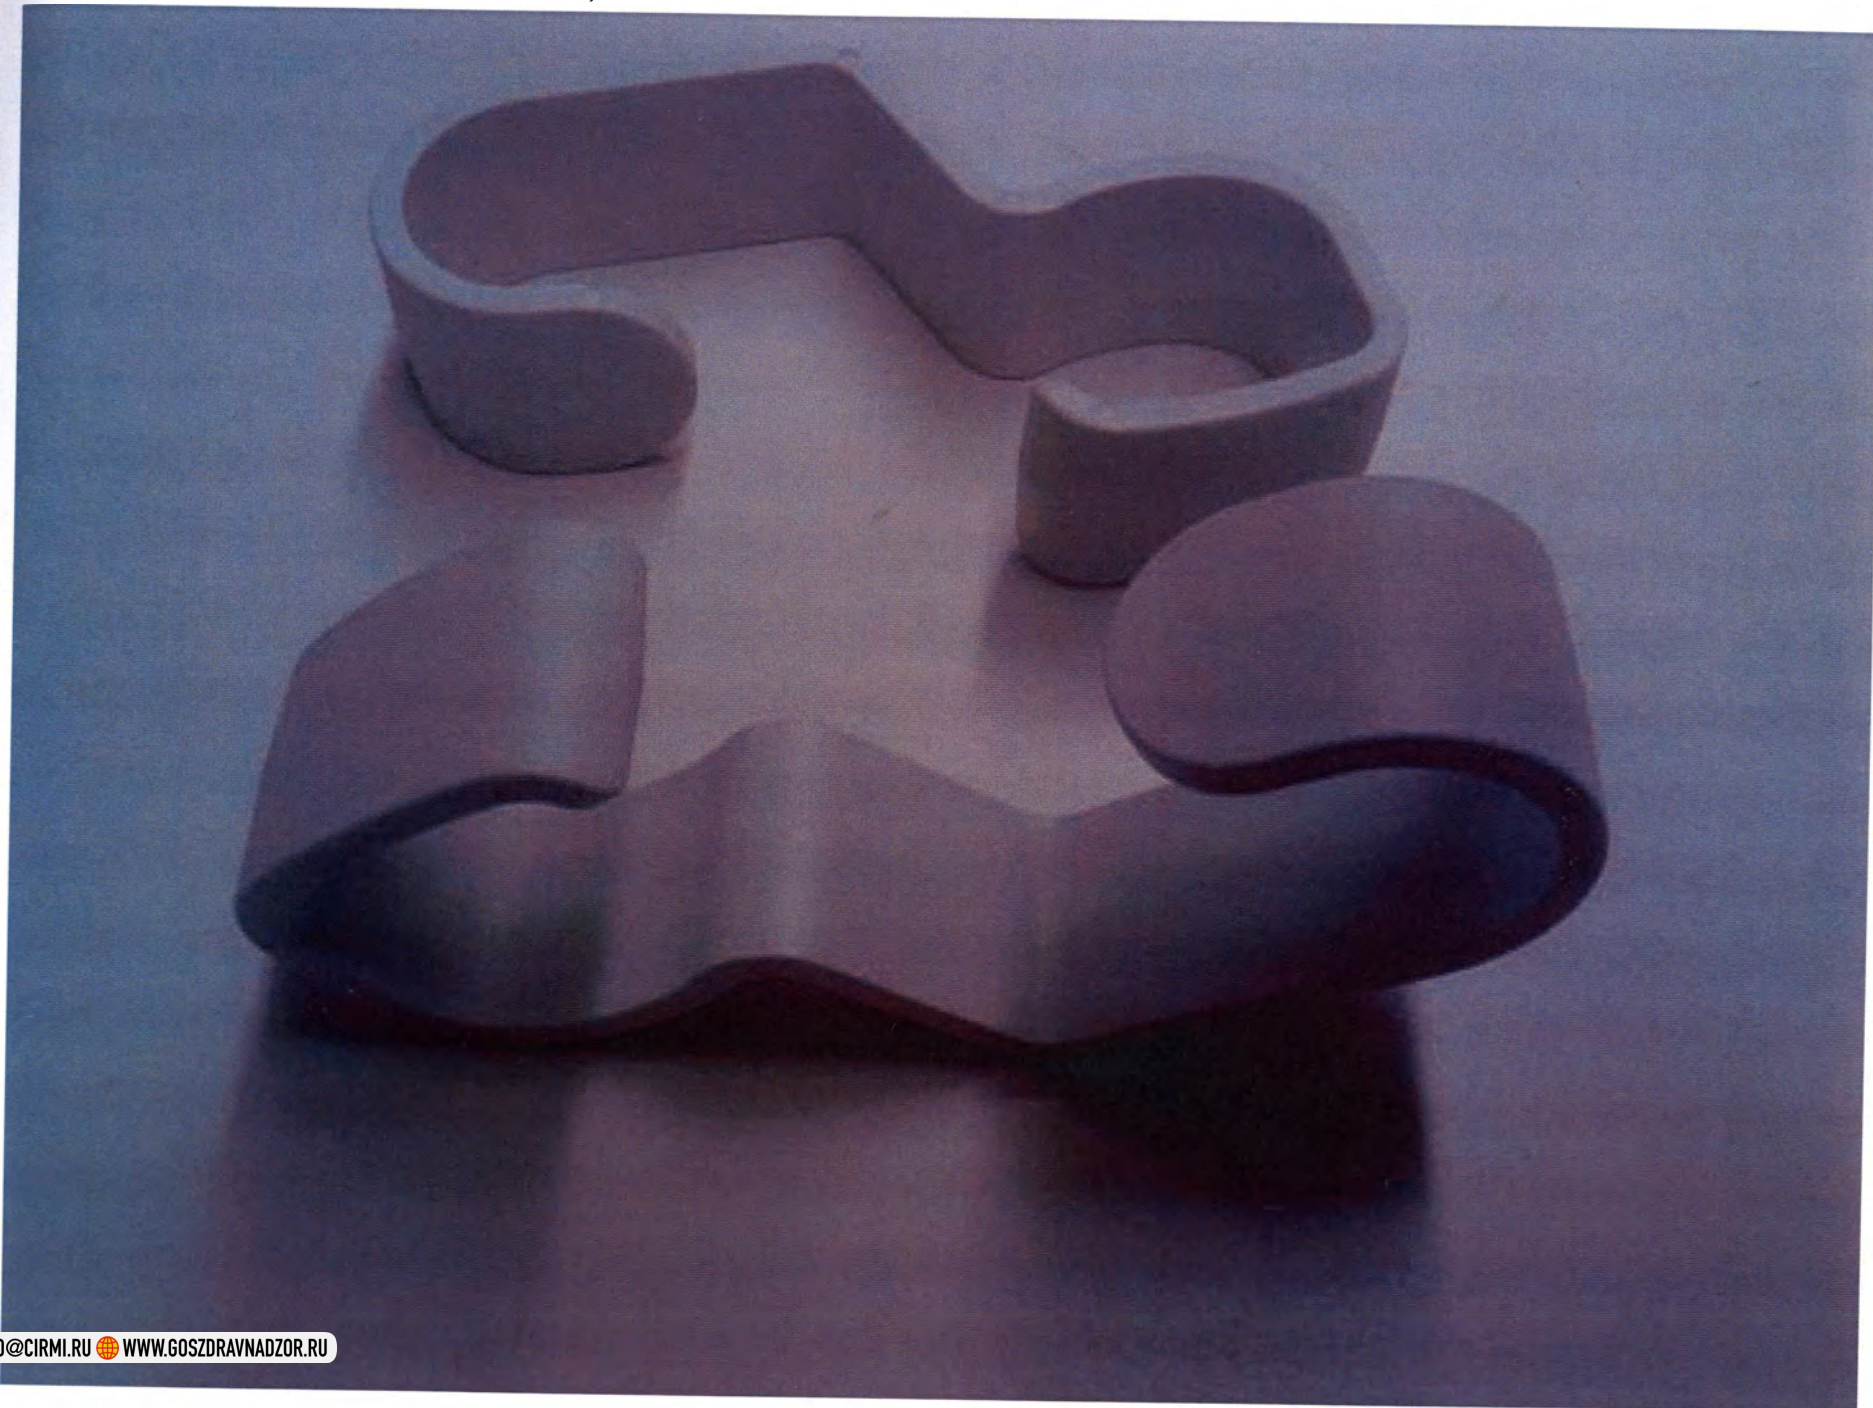

6. Заслонки (не более 2 шт.).







8. Кабель ЭКГ (не более 20 шт.).




9. Насадки биопсийные для ультразвуковых датчиков (не более 20 шт.).

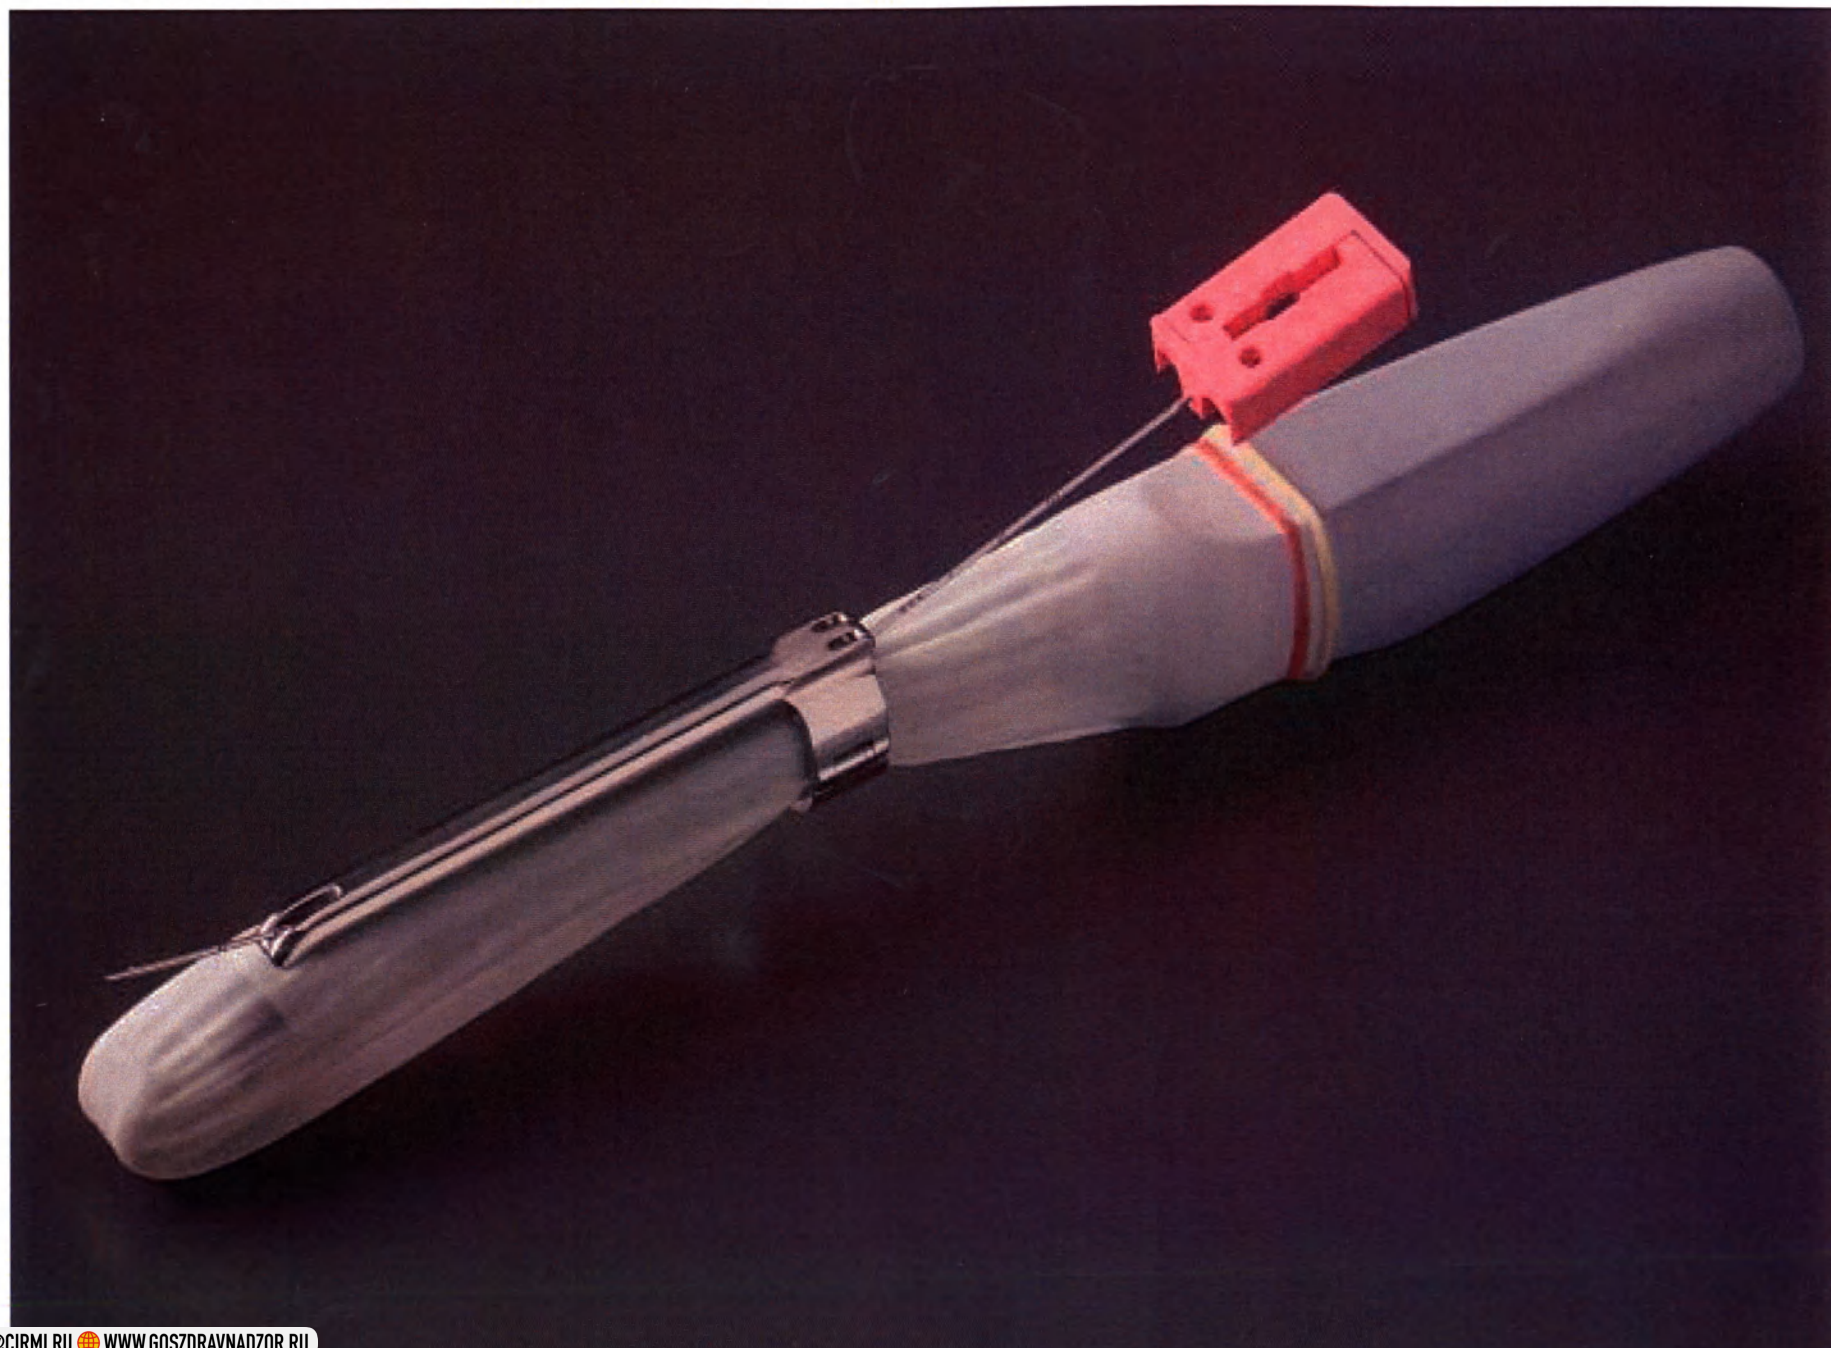

10. Отведения ЭКГ (не более 20 шт.).

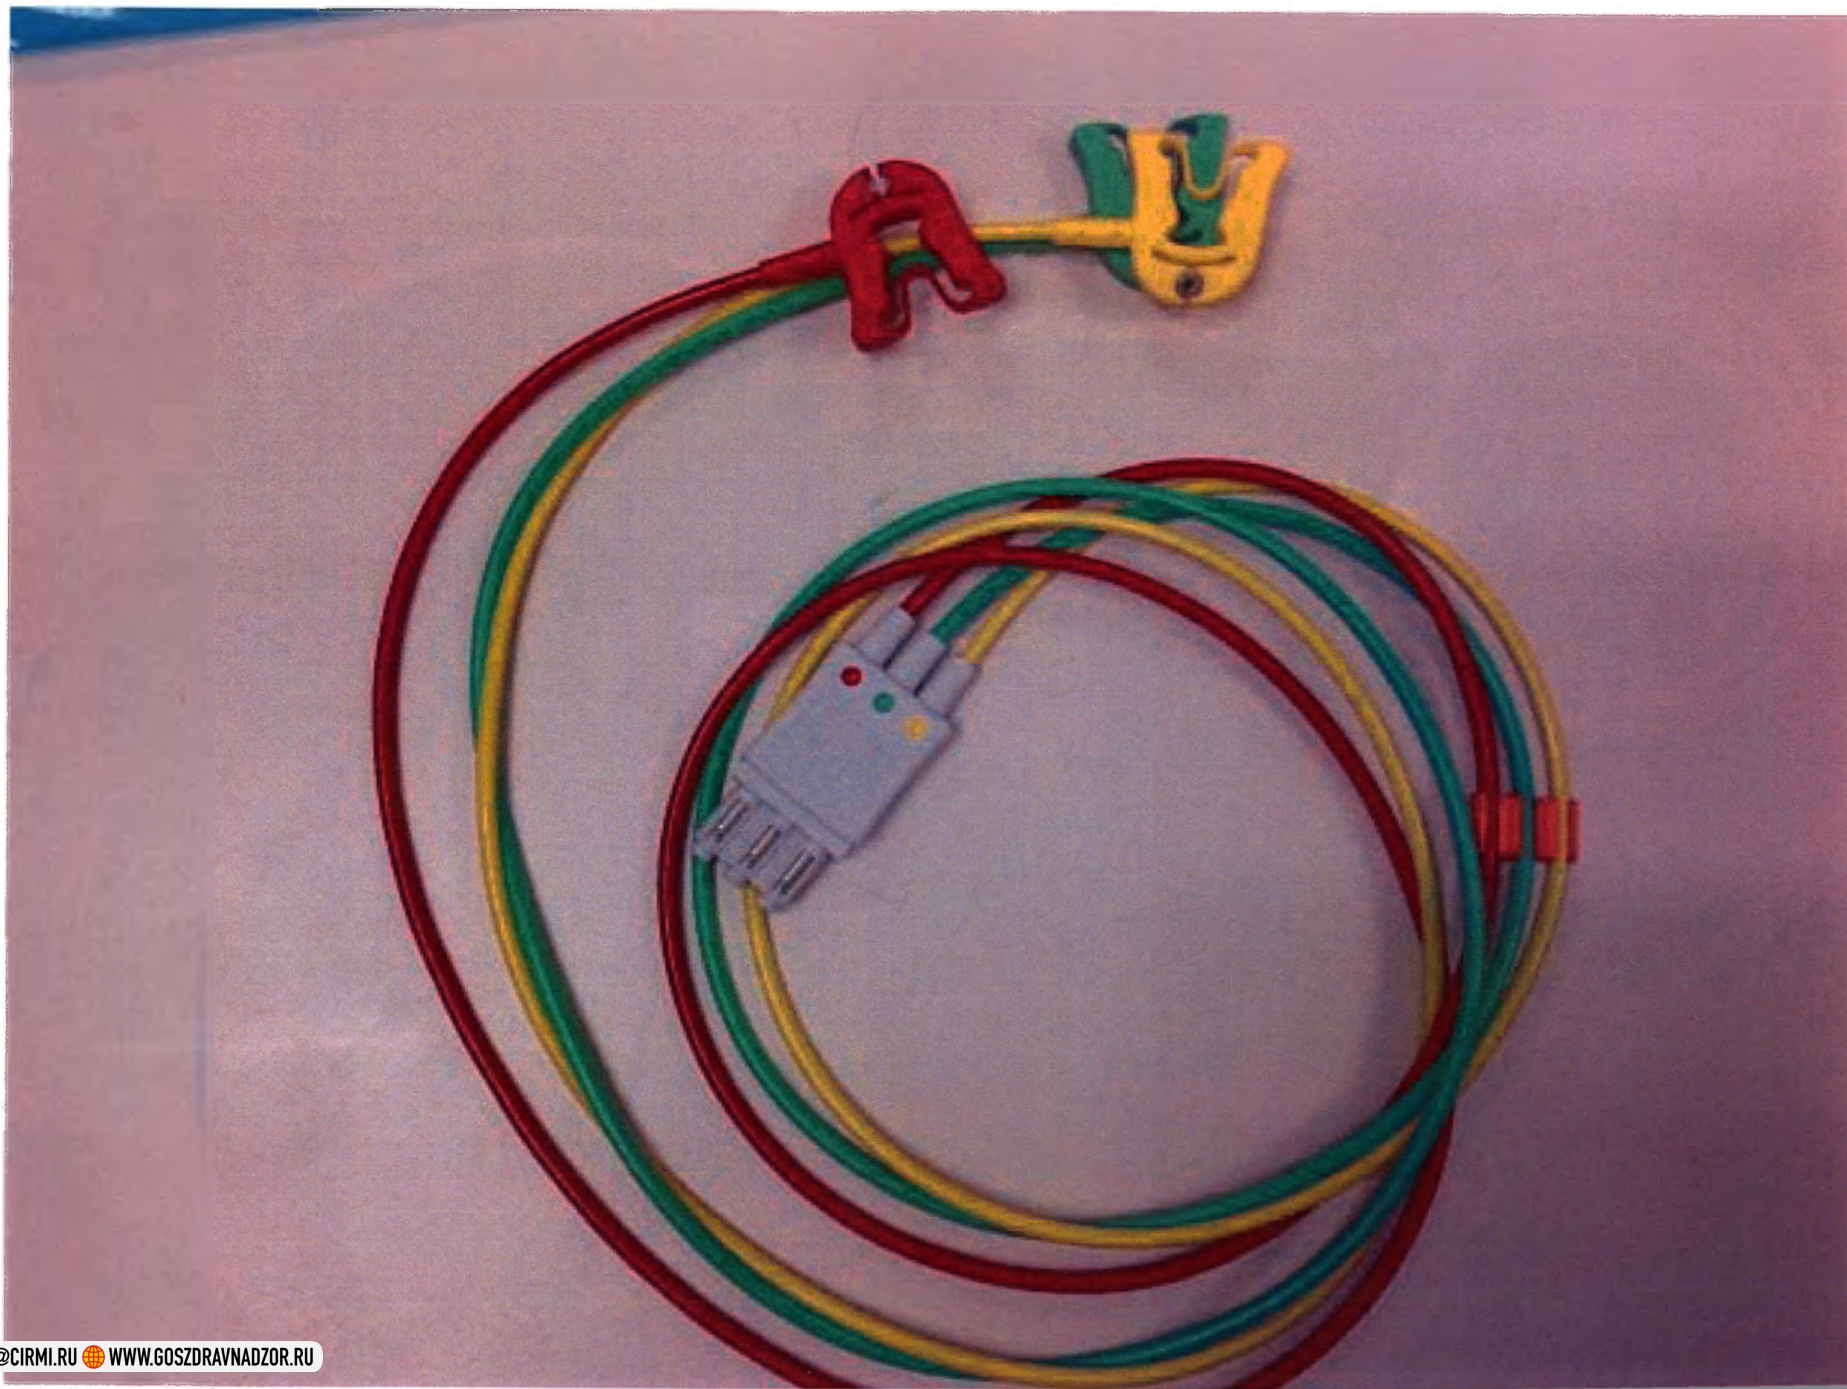


11. Переключатели ножные (педаль) (не более 2 шт.).

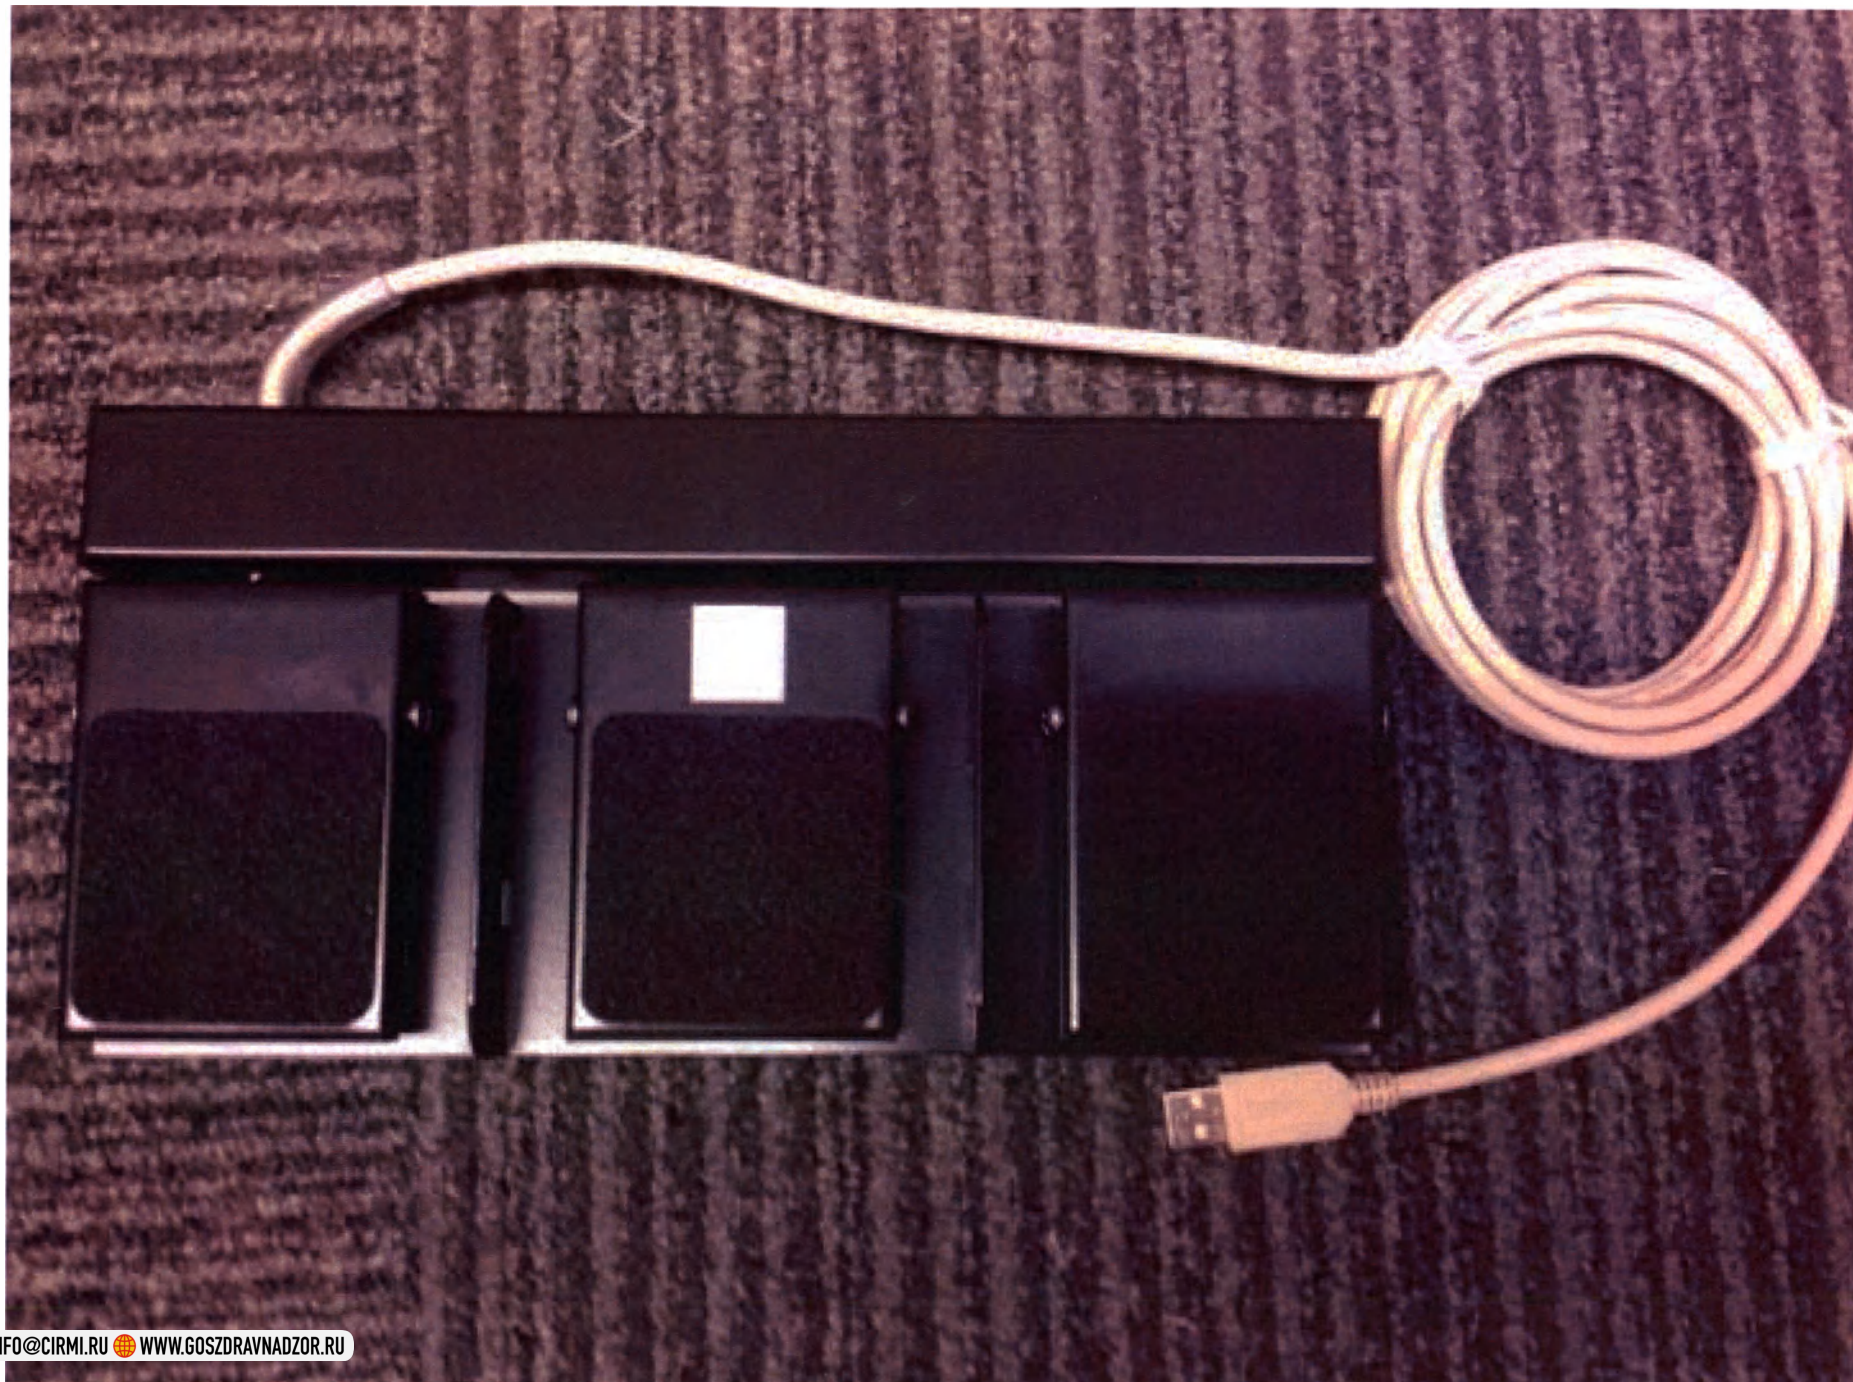



13. Программное обеспечение специальное медицинское на электронных носителях (не более 20 штук).



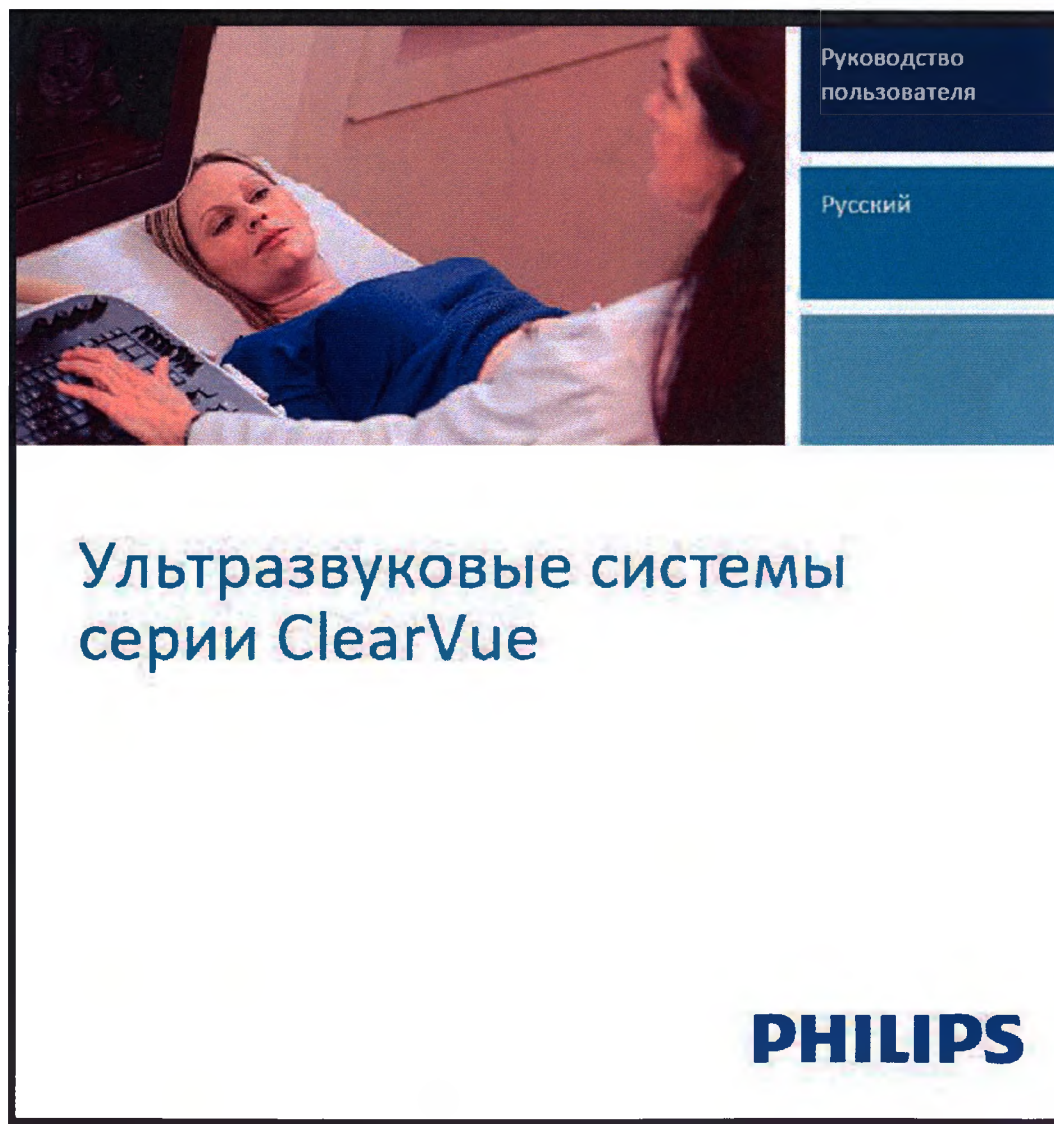

15. Устройства обеспечения бесперебойного питания (не более 2 шт.).



16. Электроды ЭКГ (не более 20 упак.).

CAL 011/11/199 10/16/11/11

DISPOSABLE ECG ELECTRODE CE

Disposable - For Single Patient Use Only
RECOMMENDED PLACEMENT:

Site selection is usually determined by hospital or physician protocol; however, care should be taken to ensure that:

1. Electrode sites are free of excessive hair.
2. Electrodes are not placed over bony protuberances, skin folds, or scar tissue.
3. Electrodes are not placed over an area of established arrhythmia or lesions of any kind.

DIRECTIONS FOR USE:

1. Prepare the skin at one application sites.
2. Connect monitor to electrode and apply electrode to patient. Press firmly around edges of electrode.










PRECAUTION: During electrosurgery, place the electrode further from the operative site than the electrosurgical dispersion pad, or use patient cables equipped with RF chokes. This will minimize RF current flow through the ECG electrodes and the risk of patient burn.

CARE AND STORAGE OF ELECTRODES:

1. Unused electrodes should be stored in the pouch with open end folded shut.
2. Store electrodes in a cool dry place.

Shelf life is 2 years when stored in proper conditions

☐	PF-55
☐	PF-50
☐	PF-45
☐	PF-35
☐	PF-30
☒	NW-55
☐	NW-45

50pcs






ПРОШТО И СКРЕПЛЕНО
ЛИСТА (ОВ) 22

